



**BOSCH**

Invented for life

# MW1-HTX-Fx Wireless Handheld Microphones



- ▶ **193 selectable UHF channels**
- ▶ **PLL synthesized technology**
- ▶ **LCD with battery status and frequency indication**
- ▶ **Lock function**
- ▶ **Approximately 15 hours operation on alkaline batteries**

The MW1-HTX-F1 and MW1-HTX-F2 wireless handheld microphones are part of the Bosch wireless microphone system. The complete system consists of a microphone receiver (MW1-RX-F1 or MW1-RX-F2), a wireless handheld microphone (MW1-HTX-F1 or MW1-HTX-F2) or a wireless belt-pack transmitter with clip-on lavalier microphone (MW1-LTX-F1 and MW1-LTX-F2). The products are sold separately to offer optimal flexibility in the composition of a system.

The wireless microphone system is designed for public address in houses of worship, restaurants, conference centers, hotels, shops and many other applications.

## Functions

### Frequencies

The microphones operate in the UHF band providing interference reduction, while the true diversity ensures stable reception. The MW1-HTX-F1 operates in the 790 to 814 MHz frequency band, and the MW1-RX-F2 operates in the 852 to 876 MHz band, each providing 193 selectable frequencies. The country overview lists the recommended type number for each country.

### Operation

The handheld microphones can operate approximately 15 hours on alkaline batteries. A lock function protects the microphone settings, making accidental changes impossible. This feature is also available on the Bosch microphone receiver and the belt-pack transmitter. An LCD on the handheld microphones shows the selected frequency and the battery status.

### Accessories

The microphones come with a case to protect them from damage. Different color microphone caps are provided for applications, where multiple microphone systems are used simultaneously. The microphones also come with an adapter for microphone stands.

### Controls and indicators

- Frequency up/down buttons
- LCD displaying frequency and battery level

## Certifications and Approvals

Region	Certification
Europe	CE Declaration of Conformity

CE Marking	acc. to R & TTE directive 1999/5/EC
EMC	acc. to ETSI EN 301489-1 acc. to ETSI EN 301489-9 acc. to ETSI EN 300422-2

### Installation/Configuration Notes

#### Country Overview


Austria	MW1-RX-F1 / MW1-RX-F2
Belgium	MW1-RX-F1 / MW1-RX-F2
Czech republic	MW1-RX-F1
Denmark	MW1-RX-F1
Estonia	MW1-RX-F1 / MW1-RX-F2
Finland	MW1-RX-F2
France	MW1-RX-F1
Germany	MW1-RX-F1 / MW1-RX-F2
Hungary	MW1-RX-F1 / MW1-RX-F2
Ireland	MW1-RX-F2
Italy	MW1-RX-F1 / MW1-RX-F2
Liechtenstein	MW1-RX-F1 / MW1-RX-F2
Lithuania	MW1-RX-F1
Luxembourg	MW1-RX-F1 / MW1-RX-F2
Netherlands	MW1-RX-F2
Norway	MW1-RX-F1 / MW1-RX-F2
Poland	MW1-RX-F1 / MW1-RX-F2
Portugal	MW1-RX-F1
Slovakia	MW1-RX-F2
Switzerland	MW1-RX-F1
Sweden	MW1-RX-F2
United Kingdom	MW1-RX-F2
Australia	MW1-RX-F1
China	MW1-RX-F1
Indonesia	MW1-RX-F1 / MW1-RX-F2
Japan	MW1-RX-F1
Korea	MW1-RX-F1
Philippines	MW1-RX-F1 / MW1-RX-F2
Taiwan	MW1-RX-F1
Thailand	MW1-RX-F1 / MW1-RX-F2
Vietnam	MW1-RX-F1 / MW1-RX-F2
MW1-RX-F1	790 to 814 MHz
MW1-RX-F2	852 to 876 MHz




*Detail of microphone holder*



*Protective case with wireless, handheld microphone and accessories*

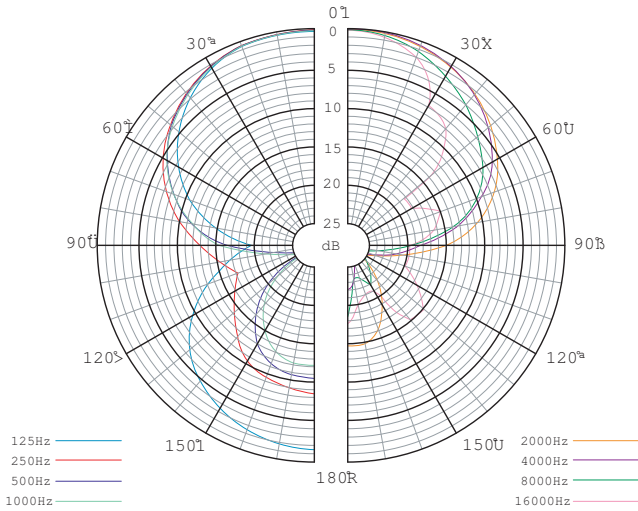

Polar diagram

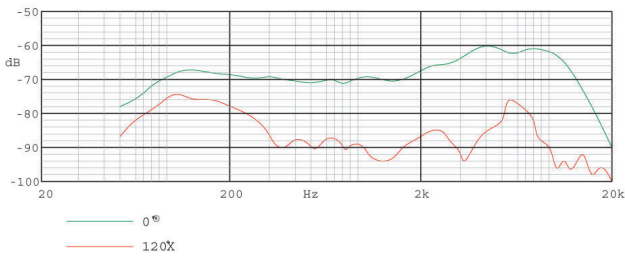

Frequency response

**Parts Included**

Quantity	Components
1	MW1-HTX-F1 Wireless Handheld Microphone or MW1-HTX-F2 Wireless Handheld Microphone
1	Microphone holder
1	Protective case
2	LR5/AA batteries
6	Color caps

**Technical Specifications**

**Electrical**

Batteries	2 x LR6/AA/UM3 1.5 V
Battery life time	Approx. 15 hrs
Modulation	FM frequency modulation
Frequency selection	PLL synthesized control
Frequency range	MW1-HTX-F1: 790 to 814 MHz MW1-HTX-F2: 852 to 876 MHz
Channels	193 channels in steps of 125 kHz
Frequency stability	±0.005%

Frequency deviation	± 48 kHz
S/N ratio	>102 dB
RF output	10 mW
Spurious rejection	>60 dBc
Dynamic range	>110 dB
Response	50 Hz ~ 15 kHz

**Mechanical**

Dimensions (H x W)	260 x 50 mm
Color	Charcoal
Weight	350 g
Antenna	Integrated

**Environmental**

Operating temperature	-25 °C to +55 °C
Storage temperature	-40 °C to +70 °C
Relative humidity	<95%

**Ordering Information**

<b>MW1-HTX-F1 UHF Wireless Handheld Microphone</b> frequency range 790 to 814 MHz	<b>MW1-HTX-F1</b>
<b>MW1-RX-F1 UHF Wireless Microphone Receiver</b> frequency range 790 to 814 MHz	<b>MW1-RX-F1</b>
<b>MW1-HTX-F2 UHF Wireless Handheld Microphone</b> frequency range 852 to 876 MHz	<b>MW1-HTX-F2</b>
<b>MW1-RX-F2 UHF Wireless Microphone Receiver</b> frequency range 852 to 876 MHz	<b>MW1-RX-F2</b>

**Americas:**

Bosch Communications Systems  
12000 Portland Avenue South  
Burnsville, Minnesota, 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschcommunications.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**